



Twin Tube Cartridge


LIONBOND™ TTC series offered complete structural bonder with package of two tube cartridge. Formulations include epoxy resin and methacrylate. Fulfill application of industry assemble and consumer repair. TTC series offered maximum possibility in assemble of industry, vehicle and home repair works.

Epoxy based

Product	Color A/B	Ratio (pbv)	Viscosity (mPas)	Worklife (25°C)	Operation temperature °C	Property and application
TTC-901s	Clear Clear	1 : 1	12,000 20,000	0.5 min	-50 ~ +120°C	Various application with super fast setting time 30 seconds. Formed clear, hard and machinable structural.
TTC-901	Clear Clear	1 : 1	12,000 20,000	1 min	-50 ~ +120°C	Various application with super fast setting time 1 minute. Formed clear, hard and machinable structural.
TTC-905	Clear Clear	1 : 1	12,000 20,000	5 min.	-50 ~ +120°C	Various application with fast curing time. Formed clear, hard and machinable structural.
TTC-910	Clear Clear	1 : 1	12,000 20,000	10 min.	-50 ~ +120°C	Fast curing and flexible. With property of weather and, impact resistance. Suitable for SMC and metals.
TTC-930	Clear Amber	1 : 1	12,000 20,000	30 min.	-50 ~ +120°C	Various application with suitable curing time. Formed clear, hard and machinable structural.
TTC-960	Whiter Amber	2 : 1	30,000 10,000	60 min.	-50 ~ +120°C	High strength with high flexibility property. Suitable for potting and assembly.
TTC-990	Neutral Yellow	1 : 1	32,000 21,000	90 min.	-50 ~ +120°C	Long working life easy adjustable. With best peer and shear strength.

Methacrylate based

Product	Color A/B	Ratio (pbv)	Viscosity (mPas)	Worklife (25°C)	Operation temperature °C	Property and Application
TTC-9300	Light grey White	1 : 1	200,000 200,000	3-5 min.	-40 ~ +180°C	Various application with 5 mins. Work time. Suitable for plastic and metals. Application for electronic assembly and composite structural.
TTC-9310	Light grey White	1 : 1	200,000 200,000	10 min.	-40 ~ +180°C	Various application with 10 mins. Work time. Suitable for plastic and metals. Application for electronic assembly and composite structural.
TTC-9360	Light grey White	1 : 1	200,000 200,000	60 min.	-40 ~ +180°C	Various application with 60 mins. Work time. Suitable for plastic and metals. Application for vehical assembly and building structural.

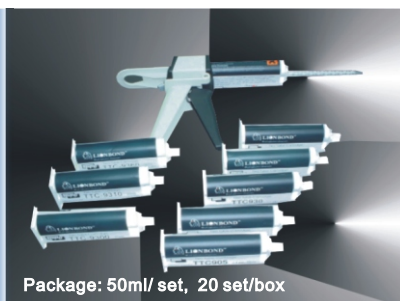

Package: 50ml/ set, 20 set/box

www.rapidchemical.com.tw

Rapid Chemical Co., Ltd.

瑞比德化工有限公司

Tel: +886-2-86926866 Fax: +886-2-86926900

E-mail: charles.hung@rapidchemical.com.tw